


双料检测器支架替换吸盘及真空吸盘系列变径

技术参数

采用材料：铝&丁腈橡胶
工作温度：①短间接接触温度℃(<30s)：-30℃~120℃ ②长间接接触温度℃：-10℃~70℃
产品优势：使双料传感器检测稳定性可靠，避免真空吸盘脱落造成设备的损坏停机
适用范围：①适用于快速搬运金属薄板(循环周期短) ②适用于汽车行业冲压生产线的搬运系统



产品型号	ΦD (mm)	Φd (mm)	H (mm)	S (mm)	重量 (kg)
DT-VCN60-BD-100	100.0	48.5	20.5	5.0	0.11

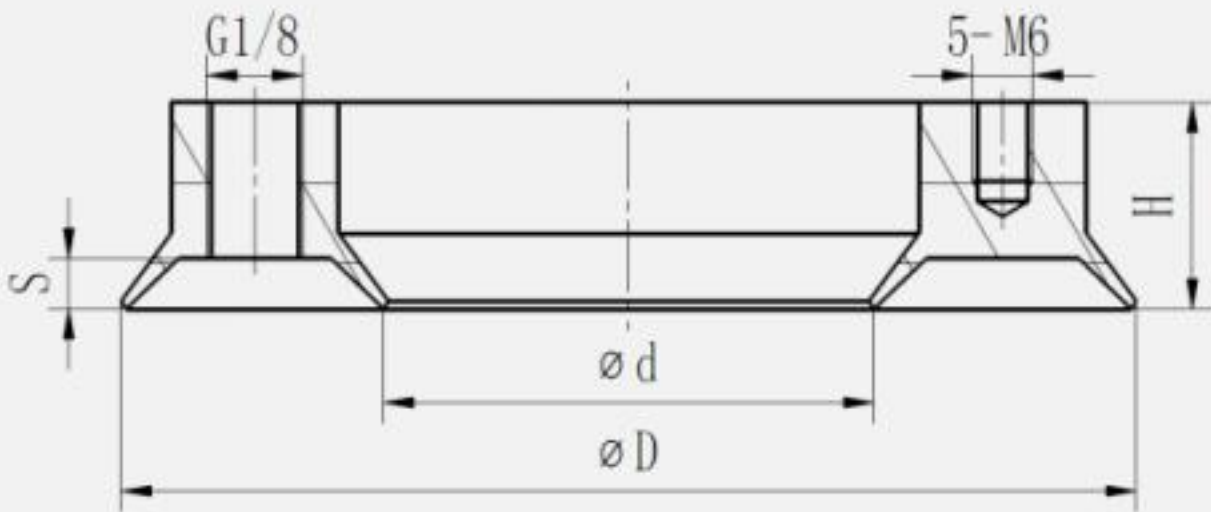

产品型号	A (mm)	B (mm)	H (mm)	H1 (mm)	H2 (mm)	扳手槽 (mm)	重量 (kg)
DT-JT-VC-G1/8AG-G1/4IG	G1/8	G1/4	25.0	12.0	8.0	17.0	0.02
DT-JT-VC-G1/8AG-G3/8IG		G3/8	26.0			22.0	0.04
DT-JT-VC-G1/4AG-G1/4AG	G1/4	G1/4		27.0	10.0	12.0	17.0
DT-JT-VC-G1/4AG-G1/4IG			12.0	10.5	0.03		
DT-JT-VC-G1/4AG-G3/8IG		G3/8			27.5	22.0	0.04
DT-JT-VC-G1/4AG-M10X1.5AG		M10X1.5			28.0	12.0	17.0
DT-JT-VC-G1/4AG-M14X1.5AG		M14X1.5		0.03			
DT-JT-VC-G1/4AG-RA		/		20.7	/	11.0	6.2
DT-JT-VC-G3/8AG-G1/4AG		G3/8	G1/4	28.0	10.0	14.0	19.0
DT-JT-VC-G3/8AG-G1/4IG	19.0			12.0	15.0	0.02	
DT-JT-VC-G3/8AG-M10X1.5AG	M10X1.5		30.0		14.0	0.03	
DT-JT-VC-G3/8AG-M14X1.5AG	M14X1.5					0.04	
DT-JT-VC-G3/8AG-RA	/		23.7	/		6.2	0.02

